

CAST IRON LIFT CHECK VALVE, FLANGED

1.13

**DN 15 - 200
PN 16**

Application:


Cold and hot water, steam and mediums neutral to the materials of the valve according to the pressure – temperature chart below.

Working temperature: 0°C – 200°C

Connection flange: DIN 2501

Face to face: DIN 3202 F1

Hydrostatic test: DIN 3230/3

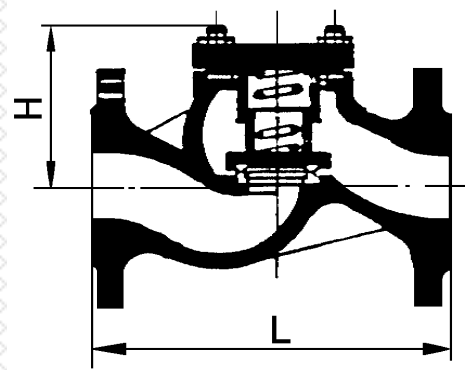

Pressure – Temperature chart

Temperature (°C)	Max. working pressure (bar)
120	16
165	13
190	11
200	10

Materials

Body	GG-25
Bonnet	GG-25
Seat	13%Cr
Sealing	Graphite

DN	15	20	25	32	40	50	65	80	100	125	150	200
L	130	150	160	180	200	230	290	310	350	400	480	600
H	65	80	85	90	96	105	125	140	155	160	200	275
Weight (kg)	2,6	3,9	4,5	6,5	8	11	17	22	28	48	65	107

M/V-IfG

Industrial Valve Trading Ltd.

H-2234 Maglód, Ady E. str. 25-39.

Tel./Fax: +36-29-325-133, -326-133

www.mvv.hu info@mvv.hu