



## CAST IRON STRAINER, FLANGED

**1.15**


### Application:

Cold and hot water, steam and mediums neutral to the materials of the valve according to the pressure – temperature chart below.

Working temperature:  $T_{max} = 200^{\circ}C$

Connection flange: DIN 2501  
Face to face: DIN 3202 F1  
Hydrostatic test: DIN 3230/3

**DN 15 - 400  
PN 16**

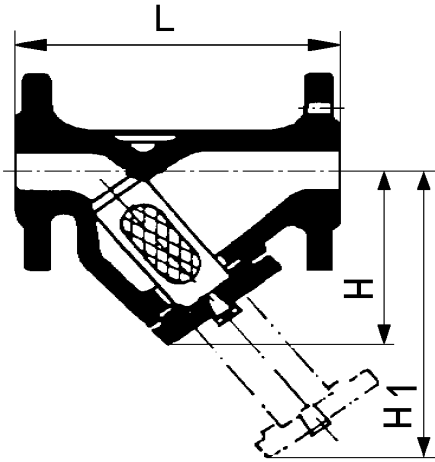

Pressure – Temperature chart	
Temperature (°C)	Max. working pressure (bar)
120	16
165	13
190	11
200	10

Materials:	
Description	Material quality
Body	GG - 25
Bonnet	GG - 25
Screen	13% Cr
Sealing	graphite

DN	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400
<b>L</b>	130	150	160	180	200	230	290	310	350	400	480	600	730	850	980	1100
<b>H</b>	68	74	98	104	117	142	170	200	240	280	325	400	485	565	640	700
<b>H1</b>	97	110	145	155	178	220	270	315	373	440	530	620	770	850	990	1050
<b>S*</b>	1,5 mm								2 mm							
<b>kg</b>	2,1	2,9	3,8	5,8	7,3	9,8	14,4	22,6	29,4	38,5	52,5	126	171	225	296	440

\* Size of mesh



**Industrial Valve Trading Ltd.**  
H-2234 Maglód, Mendei street 2.  
Phone/Fax: +36-29-325-133, 326-133  
[www.mvv.hu](http://www.mvv.hu) [info@mvv.hu](mailto:info@mvv.hu)

AA1-MM3  
11111 KICAKCOCNPAEPN001