CAST STEEL GLOBE VALVE, FLANGED

1.20

DN 15 - 200
PN 40

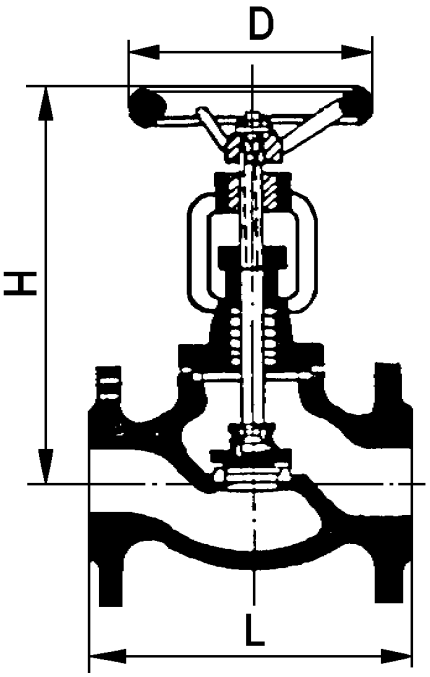

Application:

For hot and cold water, steam and fluids neutral to the materials of the valve, according to the pressure–temperature diagram as follows:

Working temperature: -25°C + 450°C

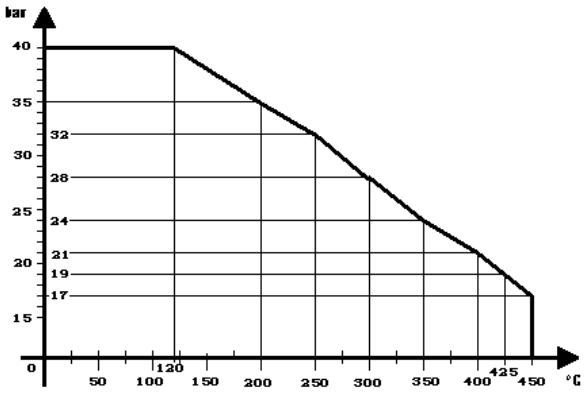

Materials:	
Description	**Material quality**
Body up to DN 25	C 22
Body from DN 32	GS-C 25
Bonnet up to DN 25	C 22
Bonnet from DN 32	GS-C 25
Seat	Acid resistant
Stem	Stainless steel
Gaskets	Asbestos free

DN		**15**	**20**	**25**	**32**	**40**	**50**	**65**	**80**	**100**	**125**	**150**	**200**
L		130	150	160	180	200	230	290	310	350	400	480	600
H	open	190	195	204	228	257	270	323	365	410	465	560	610
	closed	200	205	217	245	277	295	356	405	459	520	610	675
D		100	100	100	140	160	180	250	250	320	400	400	450
Weight kg		5	5,5	7	14	18	20	31	41	62	80	125	220

Industrial Valve Trading Ltd.
H-2234 Maglód, Mendei street 2.
Phone/Fax: +36-29-325-133, 326-133
www.mvv.hu info@mvv.hu