




DIN 2655 LOOSE FLANGE AND RING

9.57

DN 10 - 500
PN 25

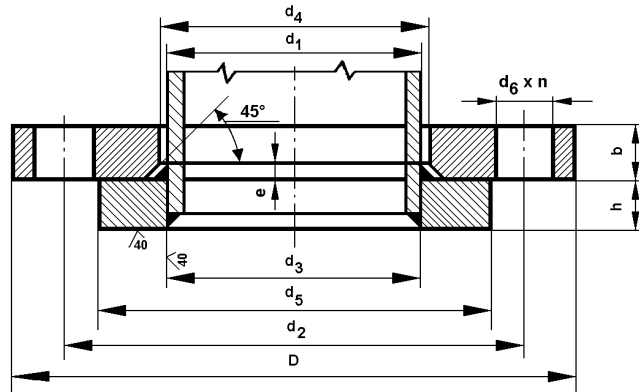

Application:

Applied as counter flanges to connect pipes and install valves in pipeline systems.

Material quality:

Up to order
(For example: RSt 37.2, KO 36)

DN	d1	d4	D	b	e	d2	d6	n	d3	d5	h	kg flange	kg ring
10-150	Same as DIN 2656 PN 40												
200	219,1	225	360	26	8	310	26	12	221,8	278	24	11,7	4,53
250	273	279	425	30	8	370	30	12	276,2	335	26	17,9	6,56
300	323,9	329	485	34	8	430	30	16	327,6	395	28	24,7	8,80
350	355,6	362	555	38	8	490	33	16	359,7	450	32	35,6	13,2
400	406,4	413	620	42	8	550	36	16	411	505	34	47,5	16,5
500	508	517	730	50	8	660	36	20	513,6	615	38	71,1	25,3



Industrial Valve Trading Ltd.
H-2234 Maglód, Mendei street 2.
Phone/Fax: +36-29-325-133, 326-133
www.mvv.hu info@mvv.hu

AAA-MM3
1000 EN13441-1-2000