





CAST IRON SWING CHECK VALVE, FLANGED

1.17

DN 40 - 200
PN 16

Application:

Cold and hot water, steam and mediums neutral to the materials of the valve according to the pressure - temperature chart below.

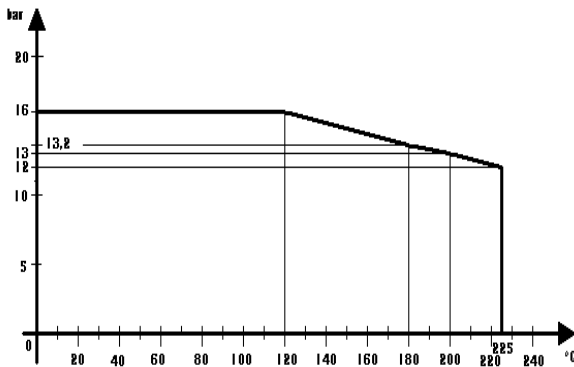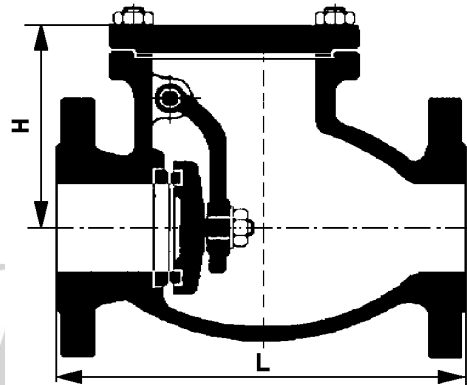

| Materials: | |
|-------------|-------------------|
| Description | Material quantity |
| Body | GG - 25 |
| Bonnet | GG - 25 |
| Seat | Bronze |
| Disc | C 22 |
| Shaft | Stainless steel |

| DN | 40 | 50 | 65 | 80 | 100 | 125 | 150 | 200 |
|-------------|-----|-----|-----|-----|-----|-----|------|-----|
| L | 180 | 200 | 240 | 260 | 300 | 350 | 400 | 500 |
| H | 120 | 135 | 150 | 170 | 188 | 200 | 220 | 265 |
| Weight (kg) | 12 | 15 | 20 | 28 | 41 | 69 | 72,5 | 105 |

M/V-IG

Industrial Valve Trading Ltd.
H-2234 Maglód, Mendei street 2.
Phone/Fax: +36-29-325-133, 326-133
www.mvv.hu info@mvv.hu

AA1-MM3
18111 KIKÉPZÉSI ÉS SZAKKÉPZÉSI KÖZPONT