




RETURNVENT® CHECK VALVE

2.30

**DN 15 - 100
PN 6, 10, 16**

Application:

For cold and water, steam and fluids neutral to the components of the valve, according to the pressure – temperature chart below. The advantage of the valve is the short design and the simple installation.

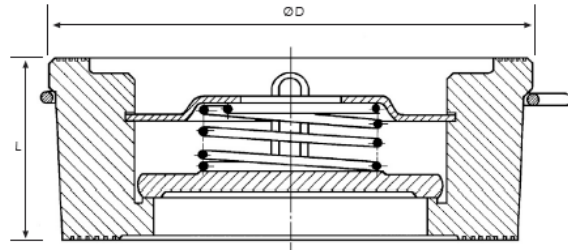

Pressure – temperature chart	
16 bar	- 60°C
16 bar	120°C
14 bar	200°C
13 bar	250°C



When you order, please advise:

- DN nominal diameter
- PN nominal pressure
- Working pressure
- Working temperature
- flowing material
- special requests

Materials:	
Description	Material quality
Body	Brass, MS 58
Segment	Stainless steel, AISI 316
Disc	Stainless steel, AISI 316
Spring	Stainless steel, AISI 316
Centering hoop	Stainless steel, AISI 316

DN	D	L	Kg/pc	Opening pressure mbar
15	40	16	0,09	25
				22,5
				20
20	47	19	0,12	25
				22,5
				20
25	56	22	0,19	25
				22,5
				20
32	72	28	0,36	27
				23,5
				20
40	82	31,5	0,55	28
				24
				20
50	95	40	0,95	29
				24,5
				20
65	115	46	1,26	30
				25
				20
80	132	50	2,18	31
				25,5
				20
100	152	60	3,26	33
				26,5
				20

Pressure drop chart

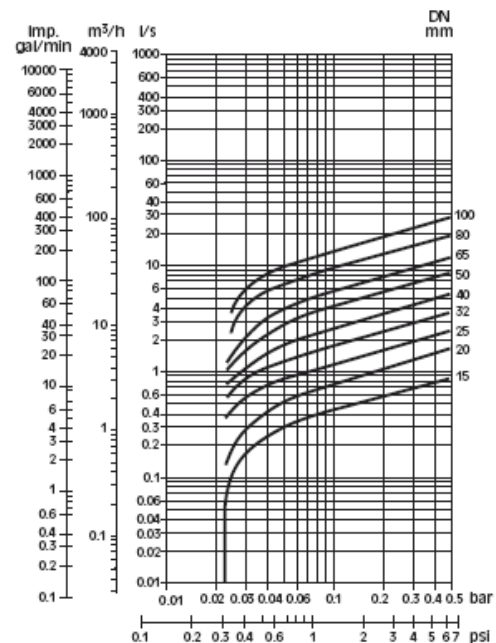

Industrial Valve Trading Ltd.
 H-2234 Maglód, Mendei street 2.
 Phone/Fax: +36-29-325-133, 326-133
www.mvv.hu info@mvv.hu

AA1-MM3
 1811 KIKÉRTÉSEK ÉS TUDÁSÁLLÁSOK