



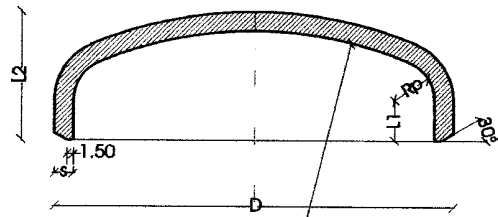

END CAP
EN 10253-1-2/02

12.61

DN 15 - 400

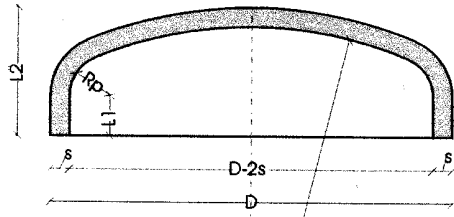

33.7 - 139.7

159 - 406.4

D	S	L2	L1	Rg	Rp	Weight
mm	mm	mm	mm	mm	mm	(kg)
33,7	2,6	15,60	4,0	33,7	3,37	0,031
42,4	2,6	17,85	4,0	42,4	4,24	0,050
48,3	2,6	16,00	4,0	48,3	4,83	0,062
60,3	2,9	19,42	6,0	60,3	6,03	0,100
76,1	2,9	24,20	6,0	76,1	7,61	0,160
88,9	3,2	26,00	7,5	88,9	8,89	0,220
108,0	3,6	32,06	8,0	108,0	10,80	0,386
114,3	3,6	31,02	8,0	114,3	11,43	0,405
133,0	4,0	37,66	10,0	133,0	13,30	0,560
139,7	4,0	38,00	12,0	139,7	13,97	0,628
159,0	4,5	47,06	15,0	159,0	15,90	0,928
168,3	4,5	48,63	10,0	168,3	16,83	1,140
219,1	6,3	68,00	20,0	219,1	21,91	2,780
273,0	6,3	94,50	40,0	273,0	27,30	5,380
323,9	7,1	101,50	40,0	323,9	32,39	6,380
355,6	8,0	115,80	40,0	355,6	35,56	10,140
406,4	8,8	129,78	50,0	406,4	40,64	10,940

Material quality: S235

The end caps can be ordered in different sizes and materials, as well.

	Industrial Valve Trading Ltd.	AA1-MM3
	H-2234 Maglód, Mendei street 2.	1611111 KIKIAMDOCEWAI11111111
	Phone/Fax: +36-29-325-133, 326-133	
	www.mvv.hu info@mvv.hu	